



DOOR GUARDS

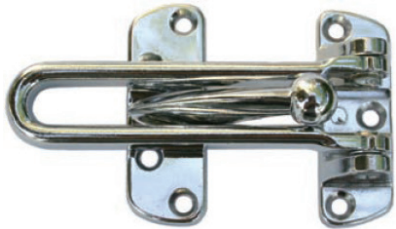

DG128/DG128BR
Safety Lock Door Guard

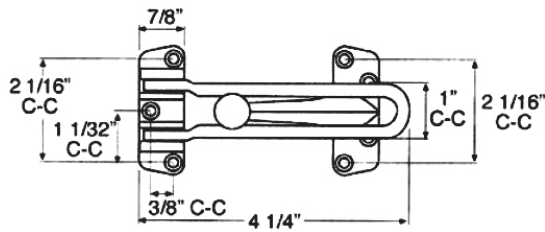

SPECIFICATIONS

ANSI	L93042 - DG128 - Heavy pressure cast alloy
ANSI	L13042 - DG128BR - Solid forged brass
Lock ball	Positive projection lock ball not allowing forced entry
Swing bar	Folds out of plate when not used
Opening	Maximum 4" door opening when engaged
Performance	Cannot be disengaged unless door is fully closed

FEATURES

INOX DG128 Door Guards are beautifully constructed from cast alloy or solid cast brass. The projected lock ball and flip swing bar disallow forced entry when engaged, and the swing bar folds out of place when it is not in use. Easily installed and provides a maximum 4 inch door opening when engaged; will not disengage until the door is fully closed. Each door guard is individually polybagged with Stainless Steel screws.

OPTIONS



DG-EDP128
Door edge protector with adhesive



DG-SHM128
Door guard shim

CODE COMPLIANCE



ANSI A156.16 L13042, L93042
C-UBC-California Uniform Builders Code
NFPA 80 - National Fire Protection Association
NFPA 101 - National Fire Protection. - Life Safety

Description

Door Guard

Part Number

DG128

Standard Finish

26D Satin Chrome

For additional finish options not listed, contact Sales Department for MOQ and lead times