


# MAGNETIC DOOR HOLDERS



**DHM2100**

## DHM2100 Recessed Wall Mount

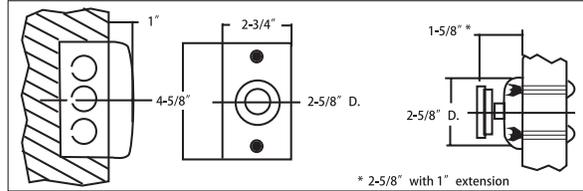

## Optional Extensions



**DHM-EX50**  
1/2" (20050)



**DHM-EX75**  
3/4" (20075)

## SPECIFICATIONS

<b>Voltage</b>	Tri-voltage can be wired 12V DC, 24V AC/DC or 120V AC
<b>Power</b>	30-45 pound holding power
<b>Extension</b>	1" Extension provided, 1/2" and 3/4" optional extensions available
<b>Installation</b>	Easy wire installation with quick insert connector
<b>Packing</b>	Thick door kits available by special order No plastic parts

## FEATURES

INOX Magnetic Door Holders are easy to install, offer flexible voltage capabilities, and strong holding power. They can be installed on fire/smoke barrier doors held open until released by remote switching devices.

The armature has 360° mobility with thru-bolts to the door for extra security.

## CODE COMPLIANCE



Meeting ANSI/BHMA 156.15 C00011  
 UL Listed for fire/smoke barrier doors  
 C-UBC-California Amended Uniform Builders Code  
 NFPA 80 - National Fire Protection Association - 1999  
 NFPA 101 - National Fire Protection - Life Safety

Description	Part Number	Standard Finish
Magnetic Door Holder (ANSI: C00011)	<b>DHM2100</b>	AL Aluminum Painted

*For additional finish options not listed, contact Sales Department for MOQ and lead times*