
LEVER DESIGNS AND FINISHES (FOR INSIDE HANDLESET)



^{*}SP is a two-tone stainless steel finish: satin (32D) finish on lever grip, polished (32) finish on lever neck and roses.

TUBULAR HANDLESETS

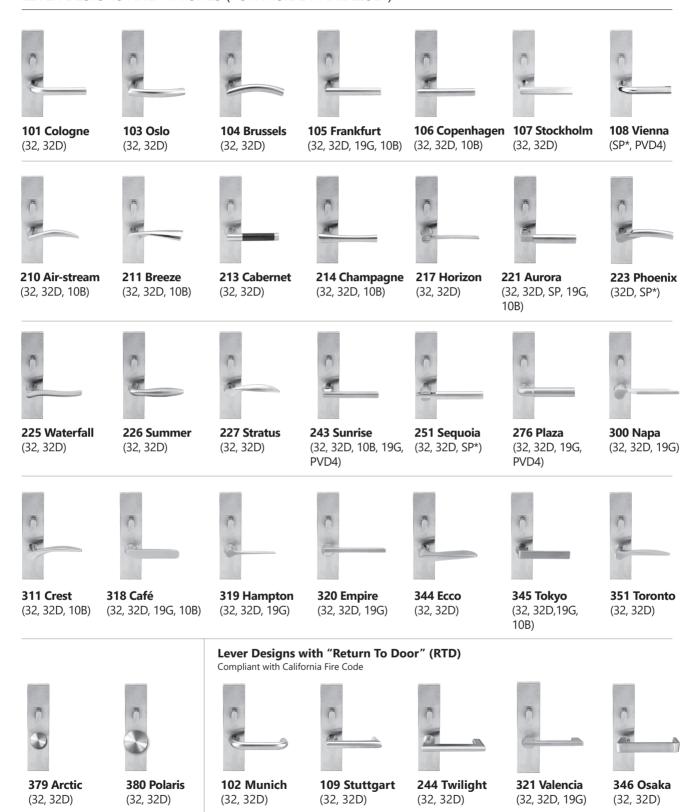

SPECIFICATIONS

Door Thickness	1-3/4" (44mm) standard Thick Door Kits available
Backset	2-3/8" (60mm) standard 2-3/4" (70mm) optional
Handing	Handing specification required Latchbolt is field reversible
Center Distance	Lever to Cylinder 5-1/2" (140mm)
Cylinder & Keys	5-pin Schlage C keyway with 2 keys
Leverset Thru-bolts	2 EA M4x35mm
Deadbolt Thru-bolts	2 EA M5x50mm

STANDARD FINISHES

- 32D Satin Stainless Steel
- 32 Bright Stainless Steel
- 10B Oil Rubbed Bronze (Limited Styles available)
- 19G Graphite Black (Limited Styles available)
- PVD4 Satin Brass (Limited Styles available)
- SP Split Finish (Limited Styles available)
- CeraMax Ceramic Coating: C19G Graphite Black,
 C19 Flat Black, CGY Stormy Grey, CDB Dark Bronze

For additional finish options not listed, contact Sales Department for MOQ and lead times

FUNCTION



Entrance (C563/C573)


Deadbolt is locked or unlocked by key outside or thumbturn inside.
Thumb-piece from outside or lever from inside retracts latchbolt.
Deadbolt and latch are not interconnected.



Entry Dummy (TDP)

NY/ MH trim with rim dummy cylinder outside, dummy plate escutcheon inside.

TUBULAR LATCH



TL5 – Residential Grade 28° Degree Latch Retraction

Backset: 2-3/8" (60mm), 2-3/4" (70mm)

Function: Passage (For Tubular Handlesets Only)

Faceplate: 1" x 2-1/4"

Backset	Function	Item Code
2-3/8" (60mm)	Passage	TL561
2-3/4" (70mm)	Passage	TL571

STRIKES

All latches come with both T-Strike and Full-lip Strike with square corners. Full-lip Strike with Radius Corner and ASA Strike can be ordered separately.

Full-lip Strike LSR-D1

1-3/4"x2-1/4"



T- Strike LSR-T1

1-1/8" x 2-3/4" w/lip 1-1/2"x1/2"




Full-lip Strike 1/4" Corner LSR-D14
1-3/4"x2-1/4"




ASA Strike (ANSI Standard) LSR-ASA

1-1/4"x4-7/8"




CHANGE LATCH BOLT DIRECTION FOR TL5 LATCH



Change the latch direction 180° with the faceplate together.


Note: Be sure to install the latch with faceplate attached to the latch body



Note: Please ensure the center line on the back of the faceplate meets the center seam of the latch case


GEAR DRIVE

Slim Gear Drive design fits perfectly in INOX Entrance Handleset Escutcheons




SPINDLE FOR TUBULAR LATCH TL5 AND GEAR DRIVE

FC-SW8875



DEADBOLT



Backset	2-3/8"(60mm), 2-3/4"(70mm)
Deadbolt	1" (25mm) throw with anti-drill pin
Function	Suitable for entry door or doors needing to be locked
Faceplate	2-1/4" x 1"
Cylinder & Keys	5-pin Schlage C keyway cylinder with 2 keys

Backset	Item No.	
2-3/8"	BT160	
2-3/4"	BT170	
3 Hour Fire-Rated		
2-3/8"	BT160F	
2-3/4"	BT170F	

DEADBOLT STRIKE AND FACEPLATE

Deadbolt Faceplate

Deadbolt Strike w/ reinforcement plate and dustbox








LSR-BT1

RIM CYLINDERS

Schlage C Keyway, 5 Pin, with Tailpiece, 2 Keys. Standard Keyed Different (KD). Other Keying Services Available.



Single Cylinder CRB105



Dummy Cylinder CRA10D



Thumbturn



Cylinder Escutcheon **EC-R460COL**