
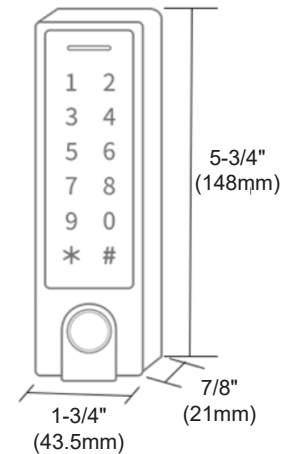


ISK-B300

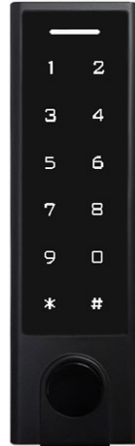

FEATURES

- Smart control unit with BLE and RFID authentication capabilities
- Can be managed by INOX Smart App
- Extended access control device directly connects to any electrified locking mechanism, including but not limited to:
 - Electrified Locks - Fail Safe (EL) or Fail Secure (EU)
 - Electrified Exit Devices Trim
 - Electrified Strike
- Modern touchscreen keypad
- Integrated with INOX Smart app for iOS and Android, supporting multi-level user roles and permissions with audit trail
- Supports remote access via BLE/WIFI Gateway
- Supports 13.56MHz Mifare RFID card/fob
- Protective metal casing
- Water resistant IP66

SPECIFICATIONS

Keypad	Touchscreen
Voltage	DC 12-18V
Relay Load	<=2A
RF Reader Distance	1" to 4"
Working Temperature	-20° F to 140° F
Working Humidity	0% to 98%
Finish	ISK-B300-BK: - Black Housing - Black Touch Screen ISK-B300-AL: - Aluminum Housing - Black Touch Screen