


CONCEALED VERTICAL ROD ED93-CVRW/ED93F-CVRW

ANSI Grade 1

APPLICATION AND FEATURES

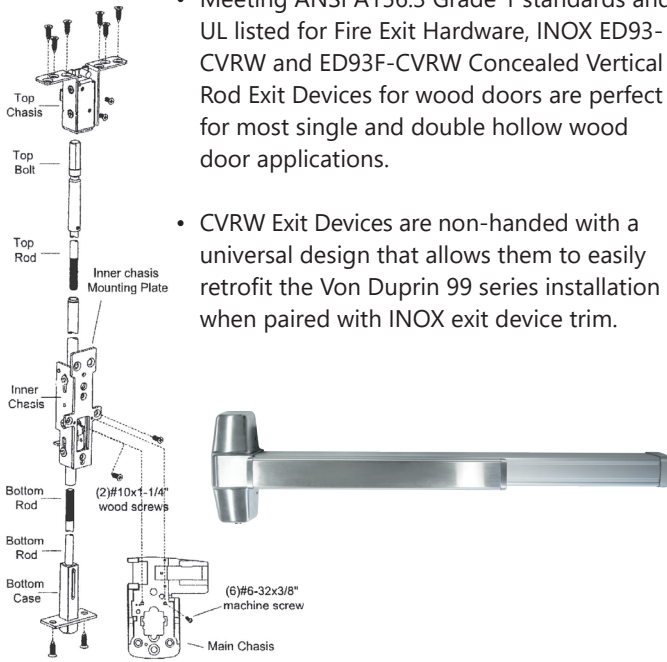

- Meeting ANSI A156.3 Grade 1 standards and UL listed for Fire Exit Hardware, INOX ED93-CVRW and ED93F-CVRW Concealed Vertical Rod Exit Devices for wood doors are perfect for most single and double hollow wood door applications.
- CVRW Exit Devices are non-handed with a universal design that allows them to easily retrofit the Von Duprin 99 series installation when paired with INOX exit device trim.

CODE COMPLIANCE



- ANSI/BHMA A156.3 Grade 1 Exit Devices
- ANSI/BHMA A156.29 Exit Lock and Alarm
- UL Listed for ANSI/UL10B and UL10C, CAN/ULC S104 up to 3 Hours
- UBC Standard 7-2 (1997) NFPA 252
- ANSI/UL 305 and CAN/ULC-S132
- NFPA 80 National Fire Protection - Fire Door Assembly
- NFPA101 National Fire Protection - Life Safety
- ANSI/BHMA A156.18 Finishes
- ANSI A117.1 ADA Accessibility
- Electrification - ANSI/UL634, ANSI/UL294, ANSI/UL10C

STANDARD FINISHES

- 32D Satin Stainless Steel

For additional finish options not listed, contact Sales Department for MOQ and lead times

SPECIFICATION

Trims	Trims available separately
Device Lengths	3': 2'2" to 3' (660mm to 914mm) 4': 2'9" to 4' (838mm to 1219mm)
Strikes	Top Dull Black (EDLSR-260) Bottom Dull Black (EDLSR-265)
Dogging Options	Hex Key Dogging available on Non-Fire Rated Devices Only
Electric Options	Alarm Kit 36" and 48" available 1. QLR - Motor Driven Retraction 2. REX - Request-to-Exit Switch 3. LBM - Latchbolt Monitor Switch
Miscellaneous	GBK Glass Bead Kit PA Panic Armor
Fasteners & Sex Bolts	Furnished with wood & machine screws
Latch Bolt	Stainless Steel 3/4" (19mm) throw
Device Centerline from Finished Floor	41" (1041mm)
Center Case Dimensions	8-3/32" x 2-13/16" x 2-15/32" (206mm x 71mm x 63mm)
Mechanism Case Dimensions	2-3/16" w x 1-15/16" (55.4mm x 49.1mm)
Top & Bottom Latch Case	Standard Panic: 3-15/16" x 2-1/8" x 1-3/8" (100mm x 54mm x 35mm) Fire-Rated: 3-15/16" x 2-11/16" x 2-1/16" (100mm x 68mm x 52mm)
Vertical Rods	36": Top Rod: 43-1/4" (1099mm) Bottom Rod: 37-3/4" (959mm) 48": Top Rod: 56-1/16" (1424mm) Bottom Rod: 37-3/4" (959mm)
Pushbar Projections	Neutral: 3-3/4" (95.3mm) Depressed: 2-15/16" (74.5mm)