

ELPS-2

2 PTC, 2 Outputs, 1.75A, 115VAC



FEATURES

- Switching Power Supply/Charger converts a 115VAC, 60Hz into two individually PTC protected auto-resettable 12VDC or 24VDC outputs.
- Intended for applications requiring UL 294 listing.
- Automatic switch over to stand-by backup battery when AC fails.

CODE COMPLIANCE



UL294 Access Control Systems

CSFM Approved


MEA

NFPA 101 Life Safety

SPECIFICATIONS

Input Voltage	115 VAC, 60 Hz, 0.6A Access control trigger input
Output Voltage	12 VDC or 24VDC 1.75A Supply Current Two Class 2 Rated Power Limited Fail-Safe / Fail-Secure Outputs Auxiliary Power Output PTC protected output, rated @2.5A Filter and electronically output Short Circuit Thermal Overload Protection
Battery Backup	Built-in charger for sealed lead acid or gel type batteries with automatic switch over to stand-by battery when AC fails.
Fire Alarm	Latching or non-latching
LED Indicators	Input voltage and DC output
Product Weight	5.1 lbs
Dimensions	8.5" W x 7.5" H x 3.5" D 215.9mm x 190.5mm x 88.9mm
Operating Temperature	32° to 120° F Maximum humidity 85%

DIMENSIONS

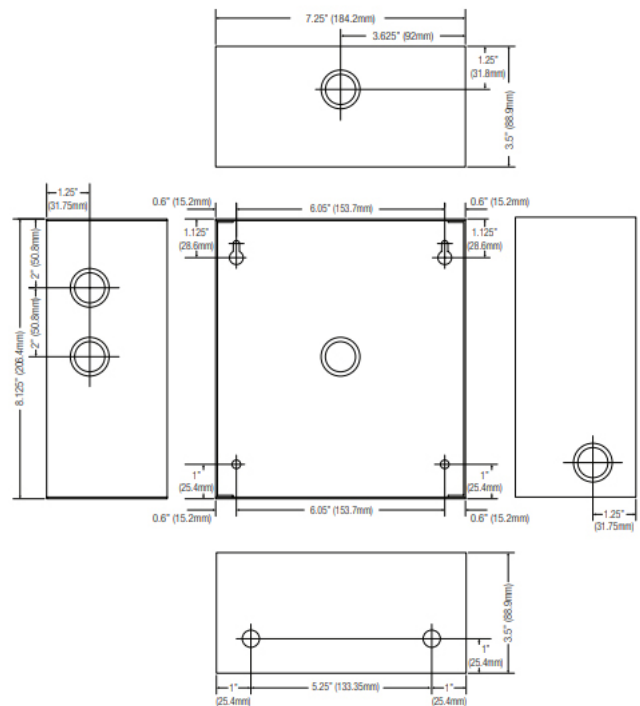

ITEM CODE

ELPS-2-C2RPO

Disclaimer: This document contains design concepts and specifications in development as a work in progress. INOX reserves the right to modify any and all parts of product design, dimensions, specifications, functions, and proprietary configurations at any time. Updated revisions will be released at INOX's discretion. Please contact Unison Hardware, Inc., to inquire about updated information before specifying and ordering this product.