

# ELPS-5

5 PTC, 2 Outputs, 5A, 115VAC



## FEATURES

- This multi-output device allows access control power supply/charger is specifically designed for use with access control systems and accessories
- Switching Power Supply/Charger converts a 115VAC, 60Hz into two individually PTC protected auto-resettable 12VDC or 24VDC outputs.
- Intended for applications requiring UL 294 listing.
- Automatic switch over to stand-by backup battery when AC fails.

## CODE COMPLIANCE



UL294 Access Control Systems

CSFM Approved


MEA

NFPA 101 Life Safety

## SPECIFICATIONS

<b>Input Voltage</b>	115VAC / 60Hz, 3.5A Access control trigger input
<b>Output Voltage</b>	12VDC or 24VDC 12VDC or 24VDC @ 4A Supply Current Five Class 2 Rated Power Limited Fail-Safe / Fail-Secure Outputs PTC protected output, rated @2.5A Overvoltage protection Filtered and regulated outputs
<b>Battery Backup</b>	Built-in charger for sealed lead acid or gel type batteries with automatic switch over to stand-by battery when AC fails.
<b>Fire Alarm</b>	Latching or non-latching
<b>LED Indicators</b>	Input voltage and DC output
<b>Product Weight</b>	7.6 lbs
<b>Dimensions</b>	13.5" H x 13" W x 3.25" D 342.9mm x 330.2mm x 82.55mm
<b>Operating Temperature</b>	32° to 120° F Maximum humidity 85%

## DIMENSIONS

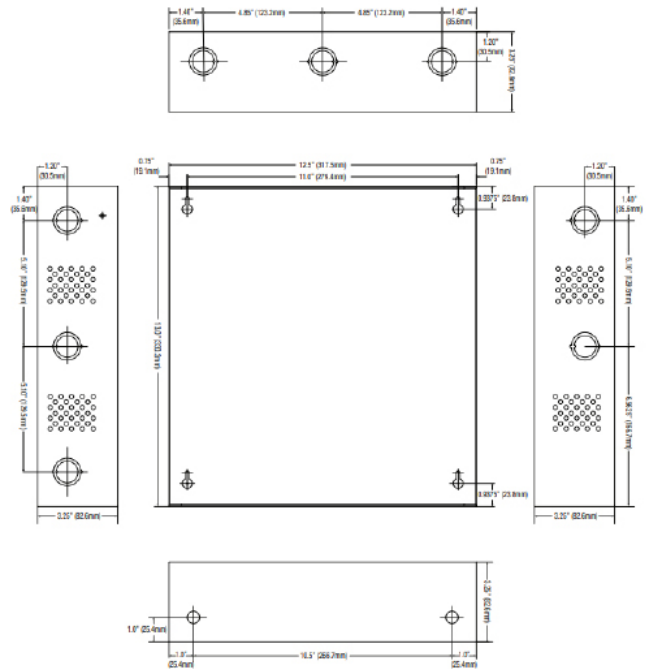

## ITEM CODE

ELPS-5-C2RPO

Disclaimer: This document contains design concepts and specifications in development as a work in progress. INOX reserves the right to modify any and all parts of product design, dimensions, specifications, functions, and proprietary configurations at any time. Updated revisions will be released at INOX's discretion. Please contact Unison Hardware, Inc., to inquire about updated information before specifying and ordering this product.