

ELPS-8 Power Supply

8 Fuse Relay, 10A, 115VAC



SPECIFICATIONS

Input Voltage	115 VAC, 60 Hz, 4.2A Eight access control trigger input 24VDC 10A Supply Current Eight independently controlled outputs
Output Voltage	Eight Auxiliary Power Outputs PTC protected output, rated @3.5A Filter and electronically output Short Circuit ACM8 board main fuse is rated at 10A
Battery Backup	Built-in charger for sealed lead acid or gel type batteries with automatic switch over to stand-by battery when AC fails.
Fire Alarm	Latching or non-latching selectable for any or all of the eight (8) outputs
LED Indicators	Input voltage and DC output
Product Weight	11.75 lbs
Dimensions	15.5" H x 12" W x 4.5" D 393.7mm x 304.8mm x 114.3mm
Operating Temperature	32° to 120° F Maximum humidity 85%

FEATURES

- This device converts a 115VAC 60Hz input into eight (8) independently controlled 24VDC Fail-Safe and/or Fail-Secure outputs with a total of 10A continuous supply current.
- Outputs are activated by an open collector sink or normally open (NO) dry trigger input from an Access Control System.
- Intended for applications requiring UL 294 listing.
- The fire alarm disconnect feature is individually selectable for any or all of the eight (8) outputs.
- Automatic switch over to stand-by backup battery when AC fails.

CODE COMPLIANCE




UL294 Access Control Systems

CSFM Approved

MEA

NFPA 101 Life Safety

DIMENSIONS

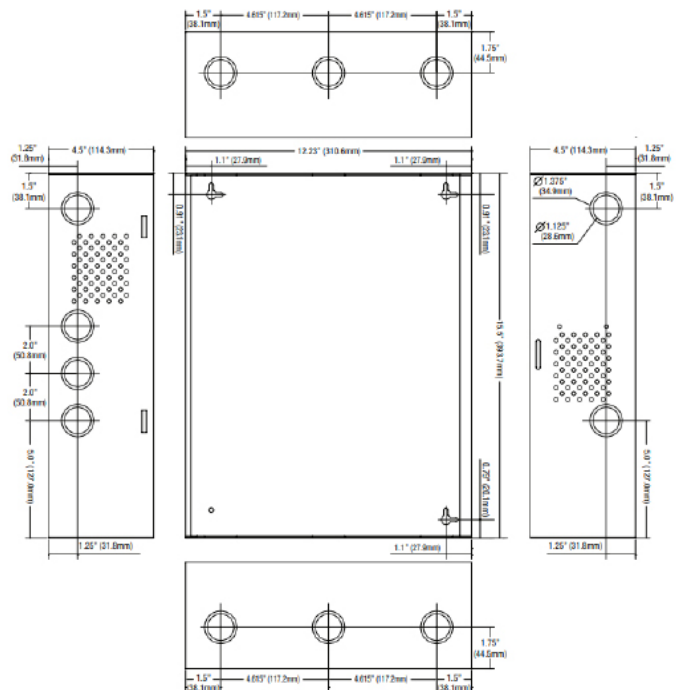

ITEM CODE

ELPS-8-ICO-10A

Disclaimer: This document contains design concepts and specifications in development as a work in progress. INOX reserves the right to modify any and all parts of product design, dimensions, specifications, functions, and proprietary configurations at any time. Updated revisions will be released at INOX's discretion. Please contact Unison Hardware, Inc., to inquire about updated information before specifying and ordering this product.