

KEYPAD AC-KP1200




SPECIFICATION

Dimensions	4-1/2" x 2-3/4" x 3/4" (114mm x 70mm x 19mm)
Temperature	-40°F to +185°F
Operating Voltage	12/24 V DC
Current Draw	30 MA standby, 90 MA Max
Capacity	999 User Codes
Code Length	Variable, up to 8 digits (10 million possible codes)
Response Time	0.3 Seconds
Relay Contact Rating	3 AMPs @12/24 V DC
Time Delays	1 to 255 seconds

APPLICATION & FEATURES

- Ideal for virtually any indoor or outdoor application where control of electrically locked doors is required
- Stand-alone digital keypads that support up to 999 users
- Secondary relay can be programmed as an alarm output, door operator relay, or to activate only with certain pin codes

DIMENSION

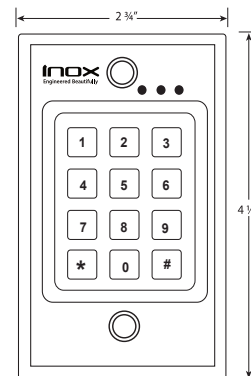

STANDARD FINISHES

- 32D Satin Stainless Steel
- BK Graphite Black