LHR DOOR
INSIDE FACE

ED81

GRADE 1 NARROW STILE
SVR EXIT DEVICE TEMPLATE
(FOR PANIC AND FIRE RATED DEVICES)

REV : 01,01/2011

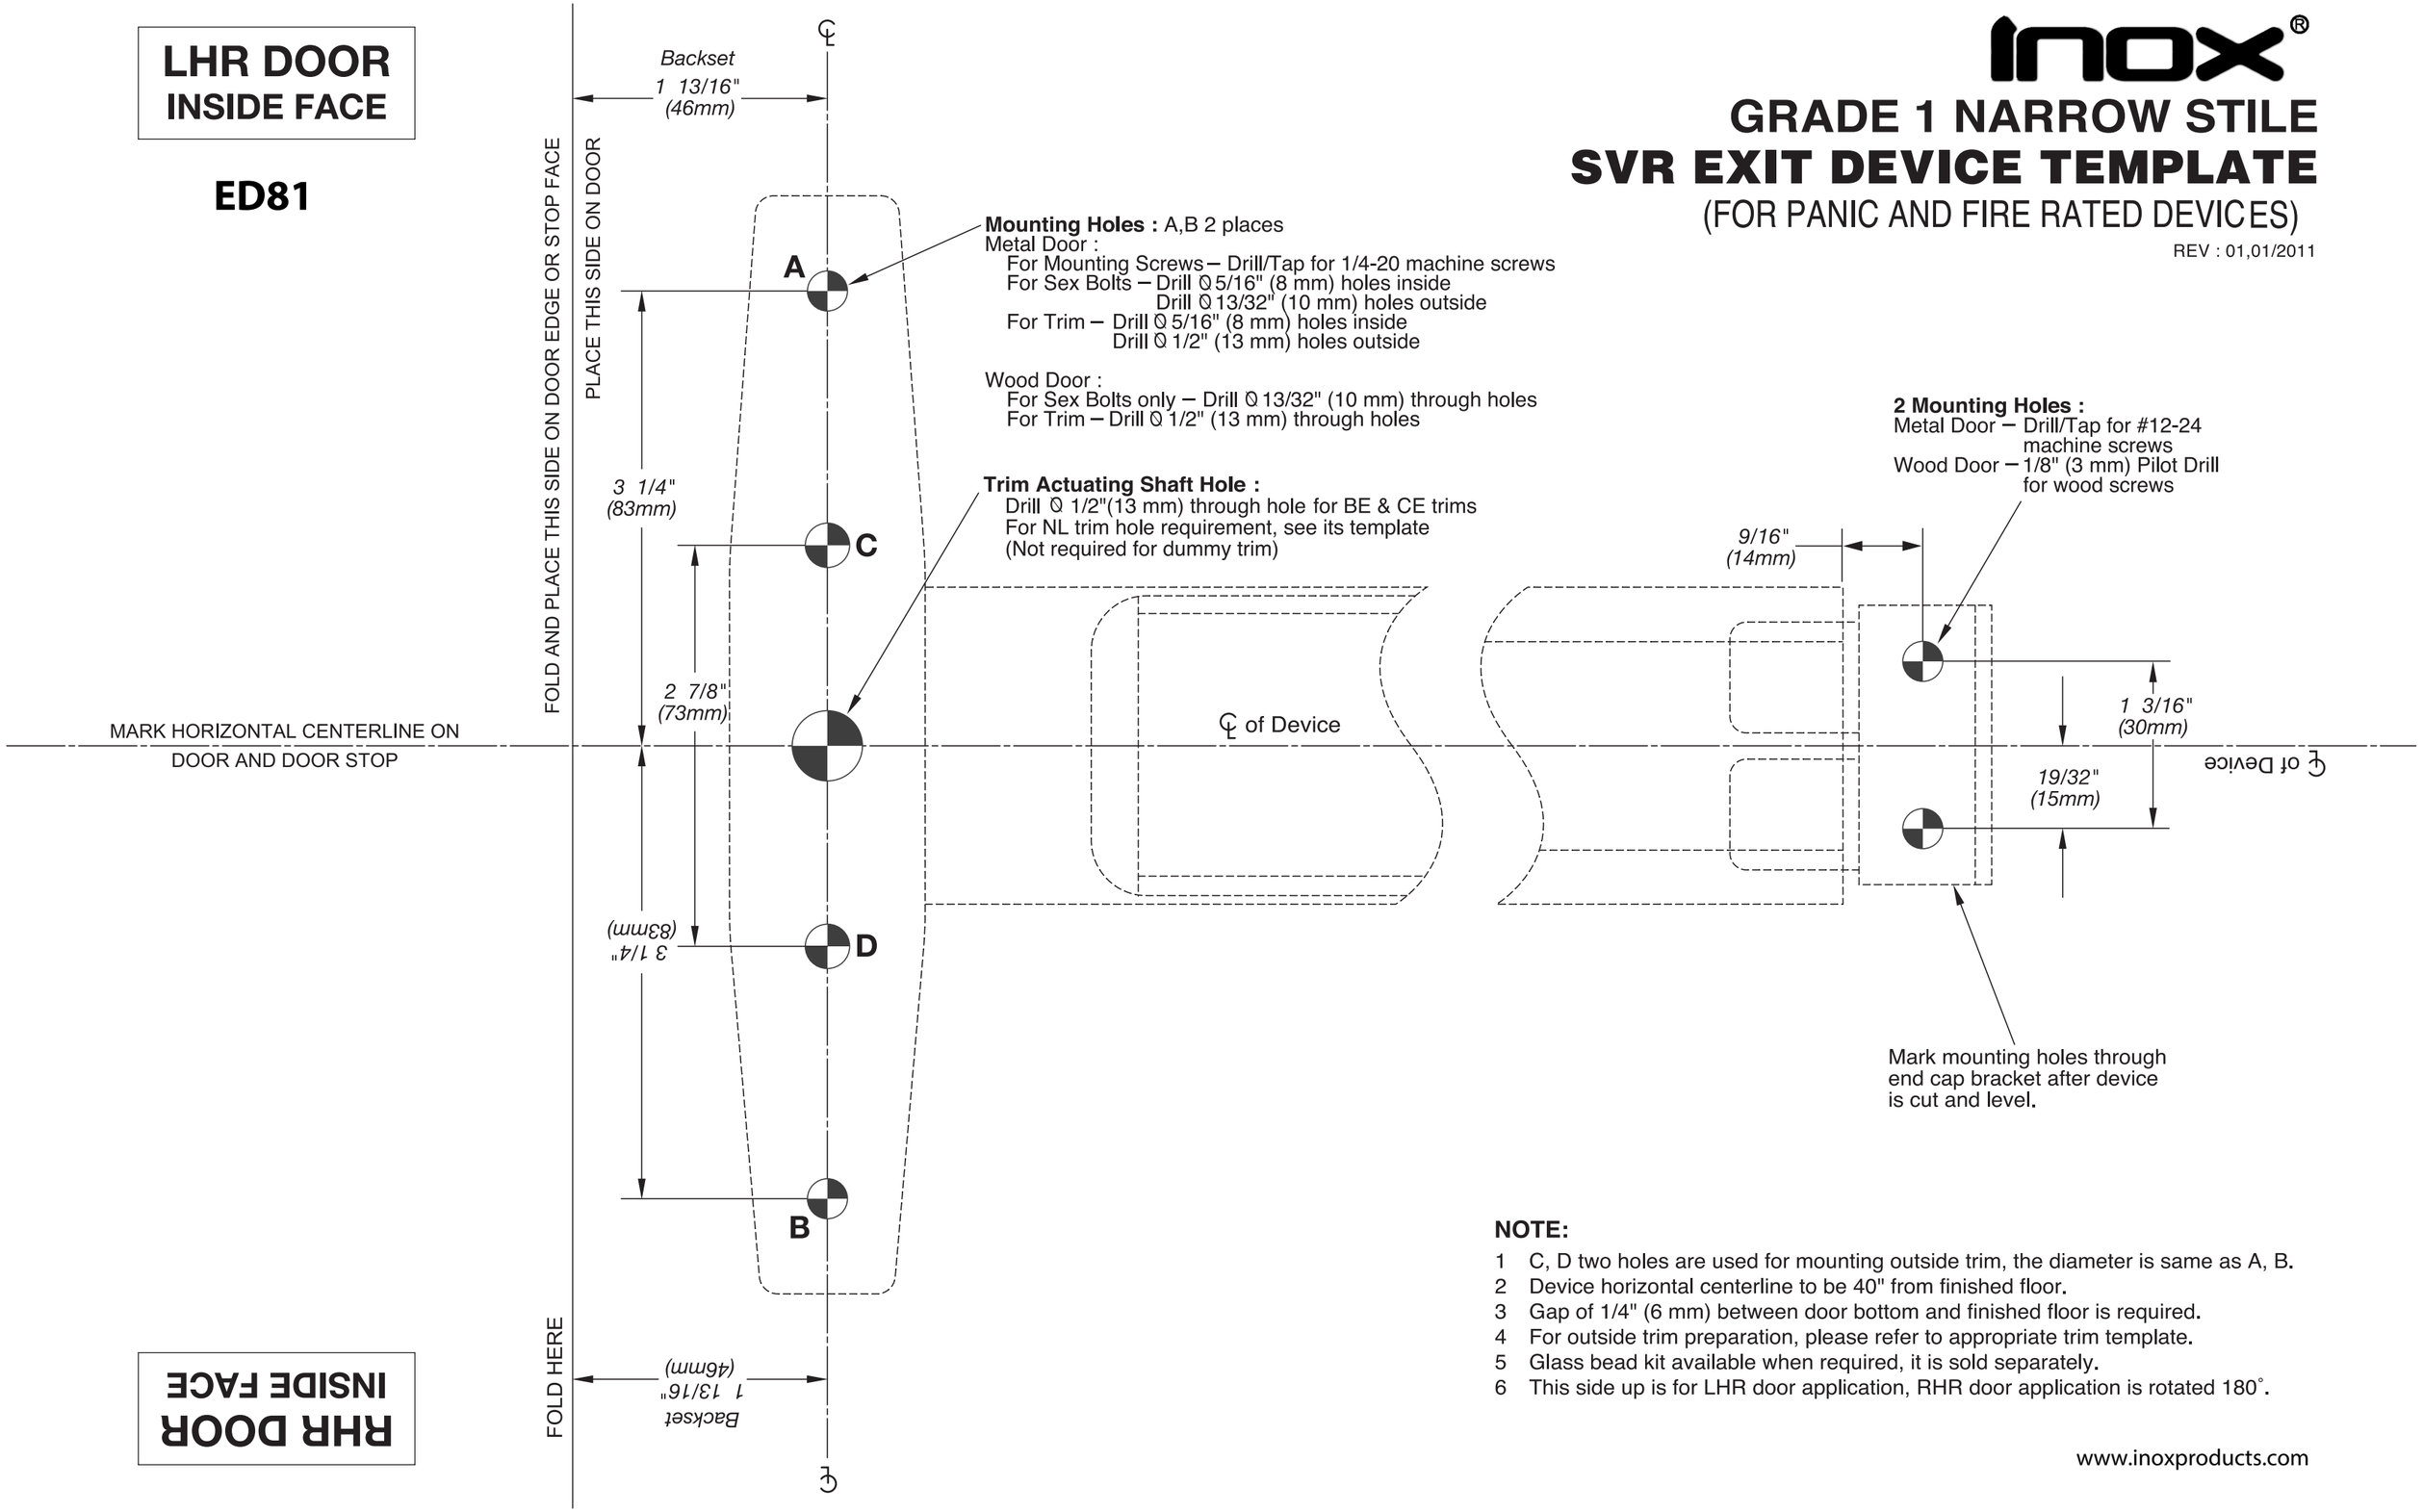

NOTE:

1. C, D two holes are used for mounting outside trim, the diameter is same as A, B.
2. Device horizontal centerline to be 40" from finished floor.
3. Gap of 1/4" (6 mm) between door bottom and finished floor is required.
4. For outside trim preparation, please refer to appropriate trim template.
5. Glass bead kit available when required, it is sold separately.
6. This side up is for LHR door application, RHR door application is rotated 180˚.