

PD9500 Series

Sliding Door Mortise Lock with Emergency Egress

- Single-action deadbolt release for emergency egress
- Patented anti-binding winged deadbolt provides smooth operation for safety and security
- Adjustable strike relieves door and frame alignment headaches
- ADA Compliant Trim

SPECIFICATIONS

SPECIFICATIO	NO				
Door Thickness	1-3/4" (45mm) Standard 1-3/8" (35mm) Thin Door Kit available for XGT only 2" to 2-1/4" (50mm to 57mm) Thick Door Kit available				
Backset	2-3/4" (70mm) 2-1/2" (63.5mm)				
Lever Spindle	8 x 8mm square				
Thumbturn Spindle	5 x 5mm square				
Center to	Lever to cylinder: 3-7/8" (98mm)				
Center Distance	Lever to thumbturn: 2-11/16" (68mm)				
Handing	Specify handing when ordering				
Cylinder	Schlage C keyway 6 pin, 1-1/4" mortise cylinder with 2 keys (standard). SFIC and LFIC housing and cores available				
CAM	CAM01-SCL Clover Cam				
Material	Trim: Stainless Steel Lockcase: Heavy gauge Steel Deadbolt: Stainless Steel				

Faceplate/Strike: Stainless Steel

Cylinder: Solid Brass

CODE COMPLIANCE



- ANSI/BHMA 156.36 Auxiliary Locks
- ANSI A117.1 Accessibility Code (ADA Compliant)


FINISH

- 32D Satin Stainless Steel
- 32 Bright Stainless Steel
- PVD4 Satin Brass (243 and 276 levers)
- CeraMax Ceramic Coating: C19G Graphite Black,
 C19 Flat Black, CGY Stormy Grey, CDB Dark Bronze
- Please see Finish Solutions on INOX Website for special order finishes

APPLICATION


Available in multiple ANSI/BHMA functions, PD95 is suited for a wide range of applications including but not limited to: Hospitality, Healthcare, Commercial, and Offices.

FUNCTION



Privacy: PD9540

- Deadbolt can be retracted by inside lever or outside emergency coin release
- Thumbturn inside locks and unlocks deadbolt
- · Outside lever is rigid at all times
- Inside lever can always retract deadbolt for emergency egress



Classroom: PD9570

- Deadbolt can be locked or unlocked by outside key
- · No thumbturn on inside
- Outside lever is rigid at all times
- Inside lever can always retract deadbolt for emergency egress




Office / Entry: PD9550

- Deadbolt can be retracted or engaged by inside thumbturn or outside key
- · Outside lever is rigid at all times
- Inside lever can always retract deadbolt for emergency egress



Security Communicating: PD9595

- Deadbolt can be retracted by outside key only
- Outside lever is rigid at all times
- · No thumbturn on inside
- No lever on opposite side; blank or blind rosette only



Patio/Exit: PD9560


- Thumbturn inside locks or unlocks deadbolt
- Outside lever is rigid at all times
- No keyed cylinder outside; door cannot be opened from outside when locked
- Inside lever can always retract deadbolt for emergency egress

FUNCTION TABLE

	Code	Inside Lever	Outside Lever	Lockcase	Cylinder	Coin Turn	Thumbturr
Privacy	PD9540	✓	✓	✓	x	✓	✓
Inner Office	PD9550	✓	✓	✓	✓	х	✓
Patio/Exit	PD9560	✓	✓	✓	ж	ж	✓
Classroom	PD9570	✓	✓	✓	✓	ж	ж
Storeroom	PD9580	✓	✓	✓	✓	х	ж
Security Communicating	PD9595	✓	х	✓	✓	ж	ж

COMPONENTS

LOCK DIMENSIONS

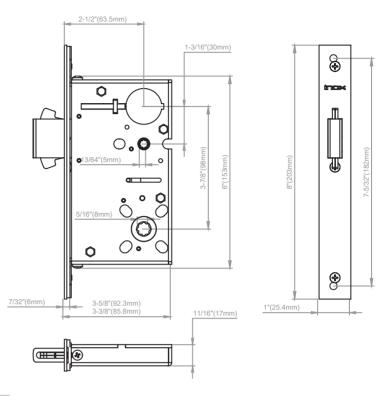


Description

- 1 PD9500 Series Lockcase
- 2 1" (25.4mm) heavy-duty brass bolt throw with self-retracting non-marring hooks
- Adjustable strike for deadbolt; up to 1/4" vertical adjustability (6.35mm)
- 4 ADA Compliant thumbturn
- 5 Schlage C keyway, 6 pin 1-1/4" mortise cylinder
- 6 Heavy-duty stainless steel cast rose with choice of X Series lever design

HANDING


- Handing refers to the direction the door slides open. Example: If the door slides to the left to open, it is a lefthanded door.
- Handing is determined from the exterior or key side of the door when facing into the room.

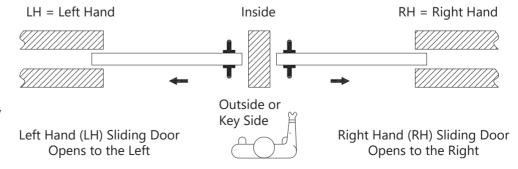

HOW TO ORDER A MORTISE LOCK FOR SLIDING DOOR

HOW TO ORDER STANDARD LOCKSETS

To order locksets with a non-standard specification, please describe the additional requirements in the same sequence as below. Please see price book for parts or additional service upcharge.

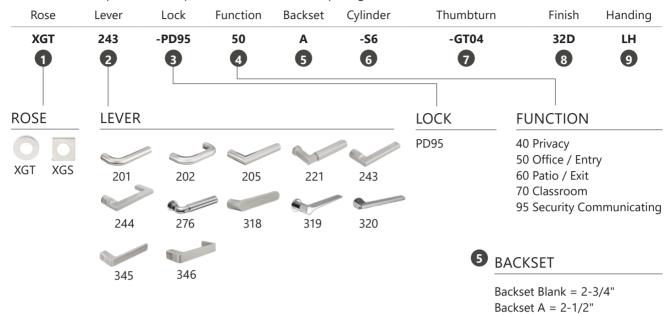

6 CYLINDER AND HOUSING (includes collar)

LC = Less Cylinder



Blank = Standard Mortise 1-1/4" Cylinder



-S6 = Small Format Interchangeable Cylinder (SFIC) Housing 1-1/4", 6-Pin, Less Core, L Clover Cam

-S7 = Small Format Interchangeable Cylinder (SFIC) Housing 1-3/8", 7-Pin, Less Core, L Clover Cam

-L6 = Large Format Interchangeable Cylinder (LFIC) Housing 1-1/2", 6-Pin, Less Core, L Clover Cam



Order IC Cores and Thick Door Kits (TDKs) separately - See Price Book

7 THUMBTURN



-GT02



-GT04



Blank = GT07 (if specifying XGT)



-GS02

-C19



-GS04

-CGY



Blank = GS07 (if specifying XGS)

-CDB

8 FINISH

Standard:



PVD4 finish available in the 243 and 276 lever design

9 HANDING

-RH = Right Hand

-LH = Left Hand