

## Tubular Handle Set



New York (NY Tubular Series)


### Application

For residential entry,  
multi-family unit entry.

### Material

Stainless Steel Levers and Escutcheons

### Finish



- Satin Stainless Steel  
US32D/630
- Bright Polished Stainless Steel  
US32/629
- Two-tone Stainless Steel (Inside Lever Only)  
SP (Satin on lever grip, Polish on lever neck,  
inside plate, outside plate and handgrip.)
- Oil Rubbed Bronze on Stainless Steel  
10B/613

\*See page 3 for finish availability.


### Specification

- Door Thickness: 1-3/4" (44mm) standard  
Thick Door Kits available
- Backset: 2-3/8" (60mm) standard  
2-3/4" (70mm) optional
- Handing: Handing specification required.  
Latchbolt is field reversible.
- Center Distance: Lever to Cylinder 5-1/2" (140mm)
- Cylinder & Keys: 5-pin Schlage C keyway with 2 keys.
- Leverset Thru-bolts: 2 EA M4x35mm
- Deadbolt Thru-bolts: 2 EA M5x50mm




Manhattan (MH Tubular Series)

### Functions



#### Entrance (C563/C573)


Deadbolt is locked or unlocked by key or  
thumb-turn inside.  
Thumb-piece from outside or lever from inside  
retract latchbolt.  
Deadbolt and latch are not interconnected.



#### Entry Dummy (TDP)

NY/ MH trim with rim dummy cylinder outside,  
dummy plate escutcheons inside.


### Door Preparation



Please go to:  
[www.inoxproducts.com/resources](http://www.inoxproducts.com/resources)  
for the latest door preparation  
templates and installation instructions.

## Tubular Handle Set

## Tubular Latch

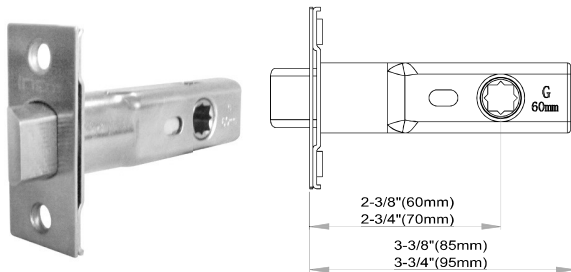


TL5 – Residential Grade  
 35 Degree Latch Retraction  
 Backset: 2-3/8" (60mm), 2-3/4" (70mm)  
 Function: Passage (For Tubular Handle Sets Only)  
 Faceplate: 1" x 2-1/4"

Backset	Function	Item No.
2-3/8" (60mm)	Passage	TL561
2-3/4" (70mm)	Passage	TL571


## Strikes

All latches come with both T-Strike and Full-lip Strike with square corners. Full-lip Strike with Radius Corner and ASA Strike can be ordered separately.


Full-lip Strike  
 LSR-D1  
 1-3/4" x 2-1/4"




Full-lip Strike 1/4" Corner  
 LSR-D14  
 1-3/4" x 2-1/4"




T-Strike  
 LSR-T1  
 1-1/8" x 2-3/4"  
 w/lip 1-1/2" x 1/2"




ASA Strike (ANSI Standard)  
 LSR-ASA  
 1-1/4" x 4-7/8"



## Change Latch Bolt Direction For TL5 Latch




Change the latch direction 180° with the faceplate together.  
 Note: Be sure to install the latch with faceplate attached to the latch body.



Note: Please ensure the center line on the back of the faceplate meets the center seam of the latch case.


## Gear Drive

Slim Gear Drive design fits perfectly in INOX Entrance Handleset Escutcheons.




## Spindle for Tubular Latch TL5 and Gear Drive

FC-SW8875



### Tubular Handle Set

#### Deadbolt

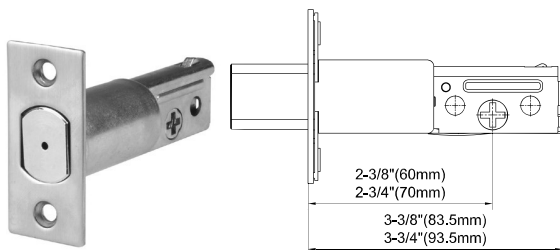

Backset: 2-3/8" (60mm), 2-3/4" (70mm)

Deadbolt: 1" (25mm) throw with anti-drill pin

Function: Suitable for entry door or doors needing to be locked


Faceplate: 2-1/4" x 1"

Cylinder & Keys: 5-pin Schlage C keyway cylinder with 2 keys

Backset	Item No.
2-3/8"	BT160
2-3/4"	BT170


#### Deadbolt Strike and Faceplate

Deadbolt Faceplate



BT1-FSP

Deadbolt Strike w/  
reinforcement plate  
and dustbox



LSR-BT1

#### Rim Cylinders


Schlage C Keyway, 5 Pin, with Tailpiece, 2 Keys.

Standard Keyed Different (KD).

Other Keying Services Available.

#### Single Cylinder

CRB105

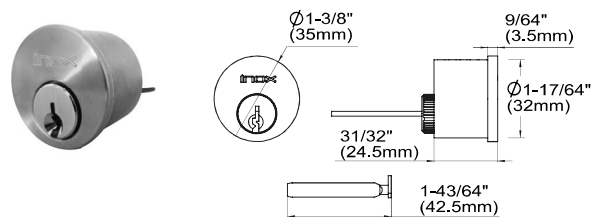

#### Dummy Cylinder

CRA10D




#### Thumb-turn

TT-04C



#### Cylinder Escutcheon

EC-R460COL



EC-S420COL

