
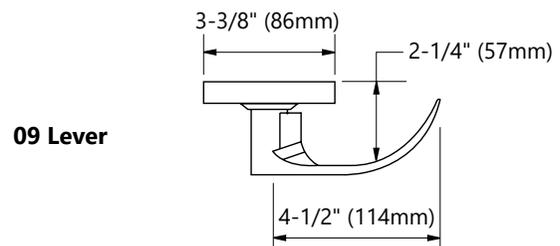
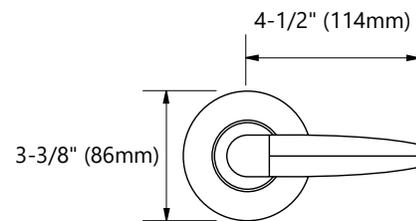
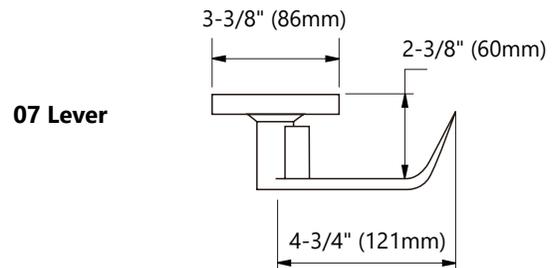


COMMERCIAL CYLINDRICAL LOCKS

BL Leversets Grade 2

SPECIFICATIONS

Door Thickness	1-1/2" (38mm) ~ 2" (51mm) standard doors
Door Prep	Standard 161 prep. w/optional thru-bolts Crossbore 2-1/8" (54mm) Edgebore 1" (25mm), Latch face 1-1/8" (28.6mm) x 2-1/4" (57mm)
Backset	2-3/4" (70mm) standard 2-3/8" (60mm) and 5" (127mm) optional
Cylinder	6-pin anti-pick tumbler, solid brass cylinder
Keys	Two (2) keys per lock. Schlage C keyway Keyed-Different standard Keyed-Alike, Construction key, Master key suite, or other keyway available by special order
Handing	Non-handed
Trim	Solid zinc diecast levers 55° lever rotation for full latch retraction
Clutch Function (CL)	Outside lever free wheeling while locked to prevent vandalism
Rose	3-3/8" (86mm) diameter. Brass roses with concealed screws Threaded interior and exterior roses Removable thru bolts
Latchbolt	1/2" (12.7mm) throw, Stainless Steel 3 hour fire-rated latchbolt Reversible for flat and beveled doors
Faceplate	1-1/8" (28.6mm) x 2-1/4" (57mm) square corner standard. Stainless Steel or brass faceplate
Strike	ANSI curved lip strike 4-7/8" (124mm) x 1-1/4" (32mm) x 1-1/4" (32mm) lip to center standard. Full lip strike or T strike available

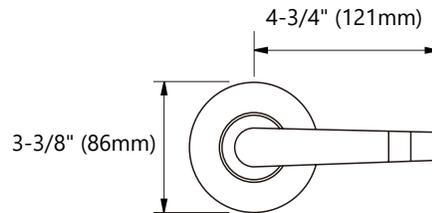


CODE COMPLIANCE




ANSI A156.2 Grade 1, UL 10C and UBC 7.2 for positive pressure
ANSI A117.1 ADA Barrier-free Accessibility
C-UBC California Uniform Builders Code-2001
NFPA-80 National Fire Protection-1999
NFPA-101 National Fire Protection-Life Safety-2000

LEVER DESIGNS

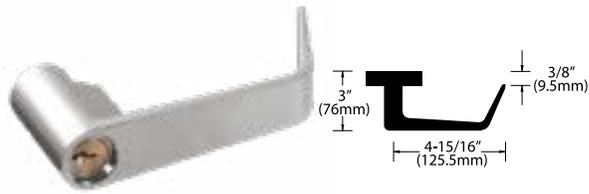

07 IN STOCK

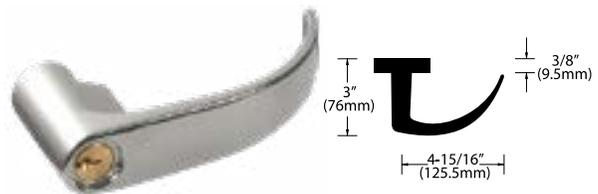


09 IN STOCK

Type	Description	Part Number	Standard Finish
Non-Keyed Lock	Passage Lock	BL0710 BL0910	19G Graphite Black 10B Oil Rubbed Bronze 26D Satin Chrome 26 Polished Chrome
	Privacy Lock	BL0740 BL0940	19G Graphite Black 10B Oil Rubbed Bronze 26D Satin Chrome 26 Polished Chrome
	Communicating / Exit Lock	BL0725 BL0925	19G Graphite Black 10B Oil Rubbed Bronze 26D Satin Chrome 26 Polished Chrome
	Single Dummy Trim	BL0717 BL0917	19G Graphite Black 10B Oil Rubbed Bronze 26D Satin Chrome 26 Polished Chrome
Keyed Locks	Entrance Lock	BL0753 BL0953	19G Graphite Black 10B Oil Rubbed Bronze 26D Satin Chrome 26 Polished Chrome
	Classroom Lock	BL0770 BL0970	19G Graphite Black 10B Oil Rubbed Bronze 26D Satin Chrome 26 Polished Chrome
	Storeroom Lock	BL0780 BL0980	19G Graphite Black 10B Oil Rubbed Bronze 26D Satin Chrome 26 Polished Chrome
Clutch Keyed Locks	Entrance Lock	BL0753CL BL0953CL	19G Graphite Black 10B Oil Rubbed Bronze 26D Satin Chrome 26 Polished Chrome
IC Core Option	Entrance Lock	BL0753IC	19G Graphite Black 26D Satin Chrome
	Classroom Lock	BL0770IC	19G Graphite Black 26D Satin Chrome
	Storeroom Lock	BL0780IC	19G Graphite Black 26D Satin Chrome

For additional finish options not listed, contact Sales Department for MOQ and lead times

FUNCTIONS


Non Keyed Locks



10 (ANSI: F75)

Passage Latch

Both levers are always unlocked from inside and outside




40 (ANSI: F76)

Privacy Lock

Outside lever is locked by push button inside
Outside lever is unlocked by outside emergency release, rotating inside lever or closing door

Inside lever is always free for emergency exit




25 (ANSI: F111)

Exit/Communicating Lock

Inside lever is always unlocked

Blank plate outside

Inside lever is always free for emergency exit




17

Single Dummy Trim

Single dummy trim for one side

Keyed Locks



53 (ANSI: F109)


Entrance Lock

Push and turn button to keep outside lever locked. Key is always required to unlock the outside lever until button is reset

Push button only locks outside lever until it is unlocked by key or by turning inside lever

Key releases outside lever and push button inside, except when inside button is pushed and turned to keep outside lever locked

Inside lever always free for emergency exit



70 (ANSI: F84)


Classroom Lock

The outside lever is locked or unlocked by key

When unlocked the lockset works as a passage set

When locked, key required from outside to unlock the lockset

The inside lever is always unlocked for emergency exit



80 (ANSI: F86)

Storeroom Lock

Outside lever is unlocked only while key is turned

Inside lever is always free for emergency exit

LATCHES

Dead Latches and Spring Latches



LSL01N
2-3/8" Spring Latch
1-1/8" Faceplate



LSL01K
2-3/8" Dead Latch
1-1/8" Faceplate



LSL02N
2-3/4" Spring Latch
1-1/8" Faceplate



LSL02K
2-3/4" Dead Latch
1-1/8" Faceplate



LSL03N
5" Spring Latch
1-1/8" Faceplate



LSL03K
5" Dead Latch
1-1/8" Faceplate



LSK-EX25
Extension for 5" Backset

Series	Description	Part Number	Standard Finish
BL	2-3/8" Spring Latch 1-1/8" Faceplate	LSL01N	19G Graphite Black 10B Oil Rubbed Bronze 26D Satin Chrome
	2-3/8" Dead Latch 1-1/8" Faceplate	LSL01K	19G Graphite Black 10B Oil Rubbed Bronze 26D Satin Chrome
	2-3/4" Spring Latch 1-1/8" Faceplate	LSL02N	19G Graphite Black 10B Oil Rubbed Bronze 26D Satin Chrome
	2-3/4" Dead Latch 1-1/8" Faceplate	LSL02K	19G Graphite Black 10B Oil Rubbed Bronze 26D Satin Chrome

For additional finish options not listed, contact Sales Department for MOQ and lead times